PINDAD EXCAVA 200 LONG ARM

ISO9001 • ISO14001
OHSAS 18001
UKAS MANAGEMENT SISTEMS
001
Certificate No. JKT6006782 • JKT6009716/A • JKT6009716/B

PT. PINDAD (PERSERO)
JL. JEND. GATOT SUBROTO NO. 517
BANDUNG 40284 - INDONESIA
TLP. (+62)-22 7312073
FAX. (+62) 22 7301222
E-mail. industrial@pindad.com
bizdev@pindad.com
www.pindad.com

EXCAVA 200 LONG ARM

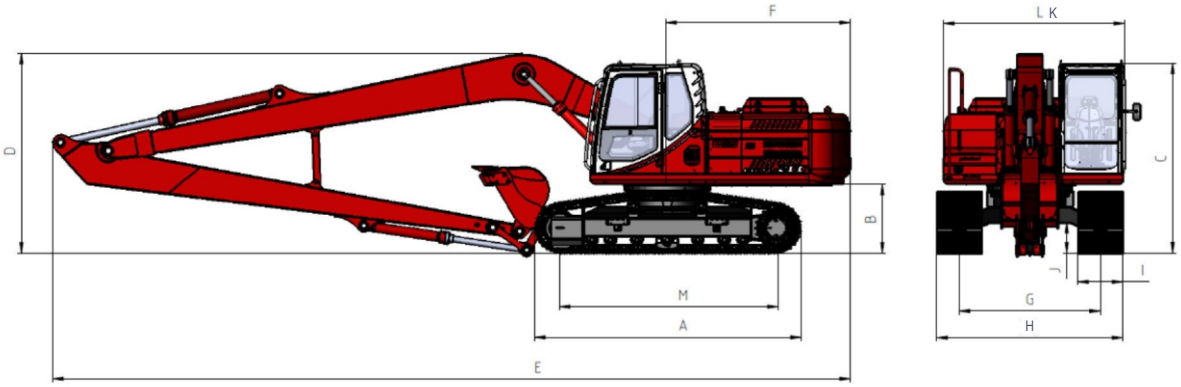

All Dimensions are Approximate

SPECIFICATIONS	
Operating Weight	24000 Kg
Travel Motor	2 Motor
Track Link	16 each side
Engine Type	Inter - Cooled Turbo
Engine Model	DEUTZ BF06M2012C
Power	127 kW / 2000 rpm
Max. Torque	705 Nm / 1500 rpm
Displacement	6.057 L
Number of Cylinders	6
Main Pumps Hydraulic Type	Two Variable Displacement Pumps + 1 Gear Pump
Main Pumps Hydraulic	Parker
Max. Flow	2 x 224.7 L / min
Working Pressure	37.2 Mpa
Swing Motor	Parker
Swing Speed	11 rpm
Fuel Tank Capacity	440 L
Hydraulic Tank Capacity	230 L

DIMENSIONS		STANDARD (mm)
A.	Max. Track Length	4149
B.	Ground Clearance Platform	1166
C.	Overall Cab Height	3038
D.	Height of Boom	3191
E.	Overall Length	12417
F.	Rear Upper Structure Length	2849
G.	Track Gauge	2195
H.	Track Width	2895
I.	Track Shoe Width	700
J.	Min. Ground Clearance	478
K.	Upper Structure Overall Width	2795
L.	Track Length on Ground	3365

Reach Excavator Working Range Long Boom
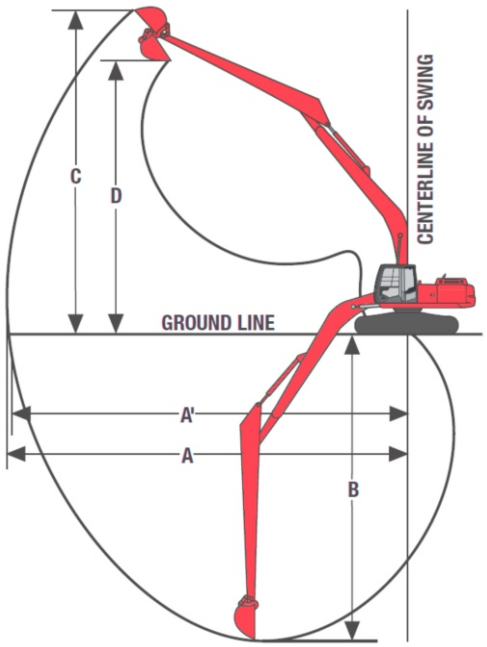
WORKING RANGE	REACH
A. Maximum Reach	15444 mm
A' Maximum Reach@ground level	15384 mm
B Maximum Digging Depth	11953 mm
C Maximum Cutting Height	12601 mm
D Maximum Dumping Height	10647 mm
Bucket Capacity (m^3)	0.5 m^3